

# Toward the Design of a Tele-assistance User Interface for Autonomous Vehicles

Felix Tener<sup>1</sup> and Joel Lanir<sup>2</sup>

<sup>1</sup> University of Haifa, Abba Khoushy Ave 199, Haifa, 3498838, Israel

<sup>2</sup> University of Haifa, Abba Khoushy Ave 199, Haifa, 3498838, Israel

## Abstract

Autonomous vehicles (AVs) are rapidly evolving as a novel and disruptive way of transportation. However, both in industry and academia, it is believed that AVs will not be able to resolve every traffic situation autonomously and therefore, remote human intervention will be required. However, existing teleoperation methods are extremely challenging and thus it is evident that novel remote operation paradigms should evolve. Such a paradigm is *tele-assistance*, which posits that remote operators (ROs) should provide high-level guidance to AVs and delegate low-level controls to automation. Our work explores how to design such a tele-assistance interface. Through interviews with 14 experts in AV teleoperation, we first discover in which road scenarios AVs will need remote human assistance. Then, based on these scenarios, we devise a set of discrete high-level commands through which a remote operator will be able to resolve most road scenarios without the need to manually control the AV. Finally, we create a prototype for such an interface.

## Keywords

Human-centered computing, human-computer interaction, interaction design, automobile, empirical study, interview, qualitative methods, user-interface design, tele-driving, tele-assistance, tele-operation

## 1. Introduction

Recent technological advancements, especially in the field of artificial intelligence and machine learning, enable rapid evolution of autonomous vehicles (AVs) as a novel way of transportation [1]. An autonomous vehicle (AV) is envisioned to be able to drive itself on its own, without any human input, using various sensors to perceive the environment identifying paths and obstacles. However, similarly to other autonomous systems, it is most likely that AVs will also require human monitoring and

intervention. Situations such as road construction, a malfunctioning traffic light, or a busy junction might prevent an AV from moving autonomously [2] and can cause disengagements<sup>2</sup> [3]. Therefore, it is widely believed today both in the industry and in academia that, at least in the near and foreseeable future, AVs will not be able to resolve all ambiguous traffic situations by their own and remote human assistance will be required [4][5][6][7][8].

A promising approach to resolve these situations and provide an actionable solution for AV disengagements is Teleoperation - operation

---

*AutomationXP23: Intervening, Teaming, Delegating - Creating Engaging Automation Experiences, April 23rd, Hamburg, Germany*

EMAIL: [felix.tener@mail.com](mailto:felix.tener@mail.com) (A. 1); [ylanir@is.haifa.ac.il](mailto:ylanir@is.haifa.ac.il) (A. 2)  
ORCID: 0000-0001-6376-3978 (A. 1); 0000-0002-9838-5142 (A. 2)



© 2023 Copyright for this paper by its authors.  
Use permitted under Creative Commons License  
Attribution 4.0 International (CC BY 4.0).



CEUR Workshop Proceedings (CEUR-WS.org)

<sup>2</sup> Disengagement - a situation when the vehicle returns to manual control or the driver feels the need to take back the wheel from the AV decision system.

of a machine from distance. While teleoperation systems for AVs are already in use and are being developed by various automotive companies [7] [9], manually driving a vehicle remotely is an extremely challenging task [10]. For example, since the remote operator (RO) is physically disconnected from the operated AV, she cannot feel the forces that are applied on the teleoperated vehicle or hear its surroundings sounds. Another example is latency, which is caused by the fact that a lot of information should be transmitted from the AV to the RO over the network [11][12].

Currently, there are two major teleoperation paradigms: *tele-driving* and *tele-assistance* (Figure 1). In *tele-driving* the remote operator continuously operates the AV using a steering wheel and pedals, while in *tele-assistance* the cooperation between the human (RO) and the machine (AV) happens on the guidance level [13].

There are many advantages of using *tele-assistance*. First, remote assistance has the potential to significantly shorten a teleoperation session time because a simple command such as “wait” or “progress slowly” would be much shorter to issue than manually driving a car. Second, *tele-assistance* might improve safety: according to the U.S. department of transportation, 94 percent of crashes in the U.S. were caused by a human error [14]. Therefore, delegating the low-level maneuvers to the AV might significantly improve AV’s safety. Third, guiding AVs using generic commands (instead of using steering and pedals) may allow ROs to control heterogeneous vehicles (with different sizes, widths, etc.) and fleets (private cars, shuttles, trucks, etc.) without the need to develop new mental models when transitioning between one teleoperated vehicle to another [10]. Finally, properly designed *tele-assistance* user interfaces (UIs) has the potential to reduce RO’s cognitive load over *tele-driving* interfaces, which are shown to require a very high level of attention [10].

Bogdoll et. al [4] performed a comprehensive analysis of recent teleoperation methods and created a taxonomy for remote human input systems of AVs. In their review, they highlight remote high-level assistance as a viable solution and one that is already being developed by several companies. In the academia, several works examined path generation as a high-level input method in which the operator “draws” the desired 2D path for the remote vehicle to follow [15][16][17]. Others, started to explore high-level interface commands that can be delegated to the AV [18][19]. However, no research work

systematically examined how such a high-level command language should look like, in what cases should it be used, and what should its components consist of. Our work aims to fill this gap and build upon it by designing, implementing, and evaluating a *tele-assistance* UI.

To create such an interface, we conducted a qualitative study with 14 experts in AV teleoperation with the aim to unveil and categorize the various disengagement scenarios. Following the study, and using the insights gained from it, we designed and implemented an initial prototype version of a *tele-assistance* UI.

## 2. High-level Concepts

### 2.1. Tele-assistance vs. tele-driving

Since teleoperation of AVs is an emerging area of research, currently there is no uniform teleoperation terminology across industry and academia [4]. However, it is possible to divide teleoperation into two major paradigms: *tele-driving* and *tele-assistance* (Figure 1). In *tele-driving* the remote operator uses a steering wheel and pedals (or other controls such as a joystick) to continuously drive the AV, while in *tele-assistance* the lower-level maneuvers are delegated to the AV through high-level instructions by the RO [13].



**Figure 1:** Left image – a schematic drawing of tele-driving, Right image - a schematic drawing of tele-assistance.

As listed earlier, we believe that *tele-assistance* has many advantages over *tele-driving*, especially when envisioning a large-scale deployment of AVs on public roads. In such a scenario, several teleoperation centers, with multiple teleoperation stations each, will be deployed in a geographic region to support all the edge-case scenarios that AVs will fail to resolve autonomously. Every RO in such a center will have to deal with many disengagements in a single work shift and therefore an efficient and intuitive teleoperation user interface (UI) is essential. Our research aims at investigating how to best design such a teleassistance interface.

## 2.2. Disengagements

The Society of Automotive Engineers<sup>3</sup> defined 6 levels of driving automation: in Level-0 there is no automation at all, while in Level-5 vehicles have full automotive technology. The levels, in between, have partial automation capabilities.

In vehicles with a safety driver (Level-1 to Level-3), a *disengagement* is a situation in which the AV returns to manual control or the driver feels the need to take back the wheel from the AV decision system. However, when discussing Level-4 and Level-5 of automation, we refer to a situation in which the AV delivers the control to a RO, who might be located miles away from the scene. Several academic works, [21]–[23] investigated the reasons for such disengagements using quantitative methods, which were applied on California’s DMV<sup>4</sup> reports. Dixit et.al.[23], thrive to provide fundamental insights into trust and reaction times in disengagements, Favaro et.al.[22], aim to improve the testing and deployment regulations for AVs on public roads, and Lv et al. [21], try to improve automation technologies. However, none of these studies addressed remote disengagements (i.e., a disengagement without a person in the vehicle). Unlike previous studies, we take a User-Centered Design (UCD) [24] approach and use qualitative analysis to look at disengagements with AVs and the way to address them through teleassistance.

## 3. Current research

### 3.1. Unveiling disengagement use-cases

With the purpose to automate driver’s actions and deliver driving low-level controls to the AV itself, we aim to define a discrete, finite, and generic command language, which can be used by *tele-assistants* in cases of disengagements and when the vehicle’s decision system needs human support. The first step in doing so is to investigate in which remote use-cases AVs will fail to deal with the remote situation autonomously. To do so we conducted in-depth semi-structured interviews with 14 experts from leading automotive companies, innovation centers of well-known automotive corporations, cutting-edge start-ups in the AV teleoperation field, and academia with an average of 20.3 years of experience in the fields.

<sup>3</sup> <https://www.sae.org/>

We used *Thematic Analysis* [25] to analyze and categorize the data and came up with eight main categories in which remote human intervention would be required. Each category included between 3 to 6 specific sub-categories. Table 1 presents these results.

**Table 1**

Reasons for remote disengagements in autonomous vehicles. The numbers within the parenthesis depict how many times each category / sub-category was mentioned during the interviews.

#	Category	Sub-category
1	Road obstacles [40]	Stationary vehicles [10] Stationary objects [10] Weather related obstacles [5] Moving vehicles [4] Animals [3] Moving inanimate objects [5] Humans [1] Lightning changes [1] Shadows [1]
2	Road infrastructure issues [35]	Problems with road signs [9] Malfunctioning traffic lights [8] Road construction [8] Perception vs. HD maps discrepancies [6] Problems with lane marks [5] Physical infrastructure issues [3]
3	Technical issues [32]	‘Regular’ problems [15] HW & SW issues [11] Issues with sensors [4]
4	Weather conditions [22]	Defected visibility [9] Limited motion [7] Strong winds [3] Extreme weather conditions [3]
5	Interaction with humans [19]	Other drivers [7] Law enforcement [6] Passengers [6]
6	Road surface issues [16]	Damaged road surface [9] Changes in road surface [6] Road color changes [1]
7	Complex traffic situations [15]	Integration into busy traffic [11] Mixed traffic environment [2] Complex road infrastructure [2]
8	Rules and regulations [11]	Crossing area rules [6] Crossing AV’s ODD (see Lee et.al., [26]) [3] Crossing traffic rules [2]

### 3.2. Designing a tele-assistance UI

Based on the above interviews and findings, we conducted several brainstorming sessions within our design team and came up with a list of possible high-level commands, which might help RO’s to resolve the above scenarios by delegating low-level controls to the AV. Table 2 summarizes our suggestions:

**Table 2**

List of possible high-level commands.

#	High-Level Command
1	Wait till another vehicle arrives

<sup>4</sup> <https://www.dmv.ca.gov/portal/>

2	Piggyback this (UI selection) vehicle
3	Find alternative path
4	Report a problem
5	Plot a new path
6	Take manual remote control
7	Continue movement
8	Perform a safe stop
9	Contact fleet management center
10	Bypass from left / right
11	Turn around
12	Wait in a safe location
13	Exchange details with another car
14	Activate internal / external microphone
15	Activate hazard light
16	Wait for the police's arrival
17	Yield to the policeman
18	Continue slowly
19	Turn right / left
20	Slow down
21	Honk gently / aggressively
22	Clear the route
23	Slowly drive backwards
24	Type a message (that will appear on the AV's body)
25	Ignore this sign
26	Change lane
27	Perform emergency stop
28	Update HD maps
30	Select a lane
31	Turn lights / high-lights on
32	Integrate into left / right lane
33	Establish an audio communication with the selected vehicle
34	Drive to the closest gas station
35	Contact a technician
36	Recalibrate sensors
37	Call a tow truck
38	Perform a software update
39	Establish a vehicle-to-vehicle (V2V) communication

Defining the above commands was a necessary step in the *Research Through Design* [28] process we follow. In addition, we performed an in-depth investigation of two additional aspects of the future interface: (1) The perspective of the video feed(s) necessary to increase RO's situation awareness (SA) and (2) The necessary UI interactions and affordances. We have reviewed 24 interfaces of teleoperation companies and performed a competitive analysis of 10 UIs from that list. In addition, we reviewed various academic works, which focus on various interaction paradigms [29]–[33]. Following this analysis, we defined the desired perspective of the video feed, visible to the RO, to be 5 meters behind and 5 meters above the teleoperated AV (Figure 2). Additionally, we defined the following interaction paradigms to be part of the designed UI: (1) Discrete high-level commands inserted via button clicks, (2) Path plotting, (3) Adding data to unrecognized object in the remote scene, (4) Selecting AI-suggested options.

After formulating the above, we designed a high-fidelity interactive *tele-assistance* prototype (Figure 2), which incorporates all the above

insights into one coherent solution. In particular, we used screen shots from Cognata's<sup>14</sup> simulation platform in order to imitate the AV's environment.

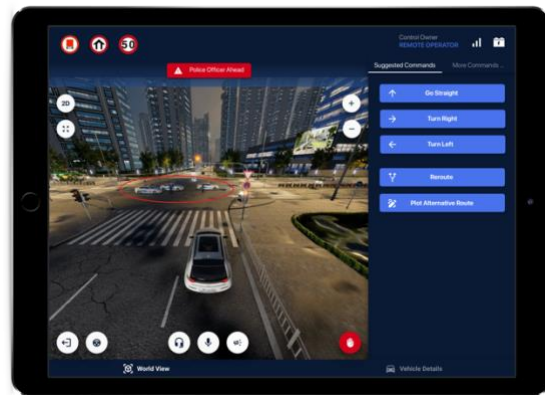


Figure 2: Tele-assistance UI, which depicts a simulated scenario of a police officer that blocks the road.

## 4. Future work

After completing the tele-assistance UI design, we plan to perform usability testing and an evaluation of the interface with expert teleoperators in order to evaluate (1) General screen taxonomy, (2) Navigation flows, (3) Necessity and location of various UI elements, (4) Interaction paradigms, (5) Affordances, and (6) Importance of the video feed perspective to RO's SA.

Next, we plan to implement the above UI with the help of the upper-mentioned simulation platform and measure the RO's cognitive load, situation awareness, task performance and overall system's usability, comparing it to a tele-driving interface. We believe that such quantitative measurements along with qualitative insights will help us understand whether the *tele-assistance* paradigm can be a substitute for *tele-driving* in the majority of the disengagement scenarios.

## 5. Acknowledgements

This work was supported by the Israeli Innovation Authority, IDIT PhD fellowship, The Israeli Smart Transportation Research Center, and The Israeli Ministry of Aliyah and Integration. We also wish to thank DriveU and Cognata for their collaboration and specifically, Eli Shapira for his help throughout this work.

<sup>14</sup> <https://www.cognata.com/>

## 6. References

- [1] D. J. Fagnant and K. Kockelman, "Preparing a nation for autonomous vehicles: Opportunities, barriers and policy recommendations," *Transp Res Part A Policy Pract*, vol. 77, pp. 167–181, 2015, doi: 10.1016/j.tra.2015.04.003.
- [2] V. V. Dixit, S. Chand, and D. J. Nair, "Autonomous vehicles: Disengagements, accidents and reaction times," *PLoS One*, vol. 11, no. 12, pp. 1–14, 2016, doi: 10.1371/journal.pone.0168054.
- [3] Mario Herger, "2021 Disengagement Report from California," 2022. <https://thelastdriverlicenseholder.com/2022/02/09/2021-disengagement-report-from-california/>
- [4] D. Bogdoll, S. Orf, L. Töttel, and J. M. Zöllner, "Taxonomy and Survey on Remote Human Input Systems for Driving Automation Systems," 2021.
- [5] N. J. Cooke, "HUMAN FACTORS OF REMOTELY OPERATED VEHICLES," *Hum Factors*, pp. 166–169, 2006.
- [6] N. Goodall, "Non-technological challenges for the remote operation of automated vehicles," *Transp Res Part A Policy Pract*, vol. 142, no. March, pp. 14–26, 2020, doi: 10.1016/j.tra.2020.09.024.
- [7] C. Mutzenich, S. Durant, S. Helman, and P. Dalton, "Updating our understanding of situation awareness in relation to remote operators of autonomous vehicles," *Cogn Res Princ Implic*, vol. 6, no. 1, pp. 1–17, 2021.
- [8] SAE, "Taxonomy and Definitions for Terms Related to Driving Automation Systems for On-Road Motor Vehicles," 2018.
- [9] GreyB, "Top 30 Self Driving Technology and Car Companies," 2021. <https://www.greyb.com/autonomous-vehicle-companies/#>
- [10] F. Tener and J. Lanir, "Driving from a Distance: Challenges and Guidelines for Autonomous Vehicle Teleoperation Interfaces," pp. 1–13, 2022, doi: 10.1145/3491102.3501827.
- [11] J. M. Georg and F. Diermeyer, "An adaptable and immersive real time interface for resolving system limitations of automated vehicles with teleoperation," *Conf Proc IEEE Int Conf Syst Man Cybern*, vol. 2019-Octob, pp. 2659–2664, 2019, doi: 10.1109/SMC.2019.8914306.
- [12] T. Zhang, "Toward Automated Vehicle Teleoperation: Vision, Opportunities, and Challenges," *IEEE Internet Things J*, vol. 7, no. 12, pp. 11347–11354, 2020, doi: 10.1109/JIOT.2020.3028766.
- [13] F. O. Flemisch, K. Bengler, H. Bubb, H. Winner, and R. Bruder, "Towards cooperative guidance and control of highly automated vehicles: H-Mode and Conduct-by-Wire," *Ergonomics*, vol. 57, no. 3. Taylor & Francis, pp. 343–360, 2014. doi: 10.1080/00140139.2013.869355.
- [14] R. Hussain and S. Zeadally, "Autonomous Cars: Research Results, Issues, and Future Challenges," *IEEE Communications Surveys and Tutorials*, vol. 21, no. 2, pp. 1275–1313, 2019, doi: 10.1109/COMST.2018.2869360.
- [15] M. Fennel, A. Zea, and U. D. Hanebeck, "Haptic-guided path generation for remote car-like vehicles," *IEEE Robot Autom Lett*, vol. 6, no. 2, pp. 4088–4095, 2021, doi: 10.1109/LRA.2021.3067846.
- [16] J. S. Kay, "STRIPE: remote driving using limited image data," *Conference on Human Factors in Computing Systems - Proceedings*, vol. 2, pp. 107–108, 1995.
- [17] D. Schitz, G. Graf, D. Rieth, and H. Aschemann, "Corridor-Based Shared Autonomy for Teleoperated Driving," *IFAC-PapersOnLine*, vol. 53, no. 2, pp. 15368–15373, 2020, doi: 10.1016/j.ifacol.2020.12.2351.
- [18] F. O. Flemisch, K. Bengler, H. Bubb, H. Winner, and R. Bruder, "Towards cooperative guidance and control of highly automated vehicles: H-Mode and Conduct-by-Wire," *Ergonomics*, vol. 57, no. 3. Taylor & Francis, pp. 343–360, 2014. doi: 10.1080/00140139.2013.869355.
- [19] C. Kettwich, A. Schrank, and M. Oehl, "Teleoperation of highly automated vehicles in public transport: User-centered design of a human-machine interface for remote-operation and its expert usability evaluation," *Multimodal Technologies and Interaction*, vol. 5, no. 5, 2021, doi: 10.3390/MTI5050026.
- [20] J. Zimmerman and J. Forlizzi, "Research through Design: Method for Interaction Design Research in HCI," *Chi 2011*, pp. 167–189, 2011.
- [21] C. Lv et al., "Analysis of autopilot disengagements occurring during autonomous vehicle testing," *IEEE/CAA Journal of Automatica Sinica*, vol. 110, no. 1, pp. 58–68, Jan. 2018, doi: 10.1109/JAS.2017.7510745.
- [22] F. Favarò, S. Eurich, and N. Nader, "Autonomous vehicles' disengagements: Trends, triggers, and regulatory limitations," *Accid Anal Prev*, vol. 110, pp. 136–148, Jan. 2018, doi: 10.1016/j.aap.2017.11.001.
- [23] V. v. Dixit, S. Chand, and D. J. Nair, "Autonomous vehicles: Disengagements, accidents and reaction times," *PLoS One*, vol. 11, no. 12, Dec. 2016, doi: 10.1371/journal.pone.0168054.
- [24] M. Lillemaa, "User-centered design".
- [25] V. Braun and V. Clarke, "Using thematic analysis in psychology," *Qual Res Psychol*, 2006, doi: 10.1191/1478088706qp0630a.
- [26] C. W. Lee, N. Nayeer, D. E. Garcia, A. Agrawal, and B. Liu, "Identifying the Operational Design Domain for an Automated Driving System through Assessed Risk," in *IEEE Intelligent Vehicles Symposium, Proceedings*, 2020, pp. 1317–1322. doi: 10.1109/IV47402.2020.9304552.
- [27] J. O. Wobbrock, M. R. Morris, and A. D. Wilson, "User-defined gestures for surface computing," *Conference on Human Factors in Computing Systems - Proceedings*, pp. 1083–1092, 2009, doi: 10.1145/1518701.1518866.
- [28] J. Zimmerman and J. Forlizzi, "Research through Design: Method for Interaction Design Research in HCI," *Chi 2011*, pp. 167–189, 2011.
- [29] C. Kettwich, A. Schrank, and M. Oehl, "Teleoperation of highly automated vehicles in public transport: User-centered design of a human-machine interface for remote-operation and its expert usability evaluation," *Multimodal Technologies and Interaction*, vol. 5, no. 5, 2021, doi: 10.3390/MTI5050026.
- [30] F. O. Flemisch, K. Bengler, H. Bubb, H. Winner, and R. Bruder, "Towards cooperative guidance and control of highly automated vehicles: H-Mode and Conduct-by-Wire," *Ergonomics*, vol. 57, no. 3. Taylor & Francis, pp. 343–360, 2014. doi: 10.1080/00140139.2013.869355.
- [31] D. Schitz, G. Graf, D. Rieth, and H. Aschemann, "Corridor-Based Shared Autonomy for Teleoperated Driving," *IFAC-PapersOnLine*, vol. 53, no. 2, pp. 15368–15373, 2020, doi: 10.1016/j.ifacol.2020.12.2351.
- [32] M. Fennel, A. Zea, and U. D. Hanebeck, "Haptic-guided path generation for remote car-like vehicles," *IEEE Robot Autom Lett*, vol. 6, no. 2, pp. 4088–4095, 2021, doi: 10.1109/LRA.2021.3067846.
- [33] J. Feiler, S. Hoffmann, and F. Diermeyer, "Concept of a Control Center for an Automated Vehicle Fleet," *2020 IEEE 23rd International Conference on Intelligent Transportation Systems, ITSC 2020*, 2020, doi: 10.1109/ITSC45102.2020.9294411.